

■ AC Power  
for Business-Critical Continuity™

# Liebert GXT3

Reliable On-Line UPS Protection In A Compact 2U Package  
700VA -3000VA



# Liebert GXT3

Reliable On-Line UPS Protection In A Compact 2U Package  
700VA -3000VA

Liebert GXT3 is a full feature UPS providing reliable protection for IT network equipment and data centers. It is a true on-line UPS that delivers continuous, high-quality AC power to IT equipment with no break when transferring to battery. It protects equipment from virtually all power disturbances due to blackouts, brownouts, sags, surges or noise interference. The UPS is available in rack/tower configurations.

One of the most affordable UPS systems in its class, Liebert GXT3 leads the industry in combining small size, high capacity and high reliability features:

## Features



- On-line design means zero transfer time from external to internal power. When utility power fails, your critical load remains supported by a seamless flow of power.



- Its rated output power factor of 0.9 better matches up with switch-mode power supplies used in today's IT equipment. A higher output power factor allows for a more efficient utilization of the UPS.



- The UPS provides easy serviceability with user replaceable hot-swappable batteries.

- For maximum control, Liebert GXT3 is custom configurable to your needs using a specially designed Windows software package.



## The Liebert GXT3 Is Ideally Suited For:



- Data Centers
- Network Computers
- VoIP
- Network Closets
- Servers
- Large Network Peripherals
- Network Storage Devices

## Bringing our Enterprise Level IT Expertise to your SMB

Emerson Network Power offers a full range of power protection solutions suitable for every requirement or scenario. From desktop computing, network equipment, computer rooms to large scale data centers, we make sure you get the same level of protection the Fortune 500 companies enjoy with Emerson. It is our way of Bringing Enterprise Level IT expertise to your SMB.



### Desktop Computing

- Liebert PSP
- Liebert PSA



### Network / Computer Room

- Liebert PSI
- Liebert GXT
- Liebert ITA



### Data Center

- Liebert ITA
- Liebert NX
- Liebert Hipulse

# Liebert GXT3 Standard Features

## Flexibility

**Up To Six Battery-Backed Outlets**  
A generous quantity of battery-backed outlets allows more equipment to be protected by the UPS.

## Rotatable Display Panel

The LED display panel rotates 90° to make the readout of the LED display easy to see in rack or tower position.

## Automatic Frequency Sensing

The UPS automatically adjusts to the input frequency, 50Hz or 60Hz.


## Mounting Flexibility

Optional telescoping rack rails mount to the sides of the UPS for easy installation into a rack enclosure. The UPS is provided with a standard tower support base.

## The Proven Reliability Of True On-Line Operation Plus The Features You Need Most

Although Liebert GXT3 requires just a slim 2U of rack space, it provides the capabilities of a physically larger system. Get up to 3kVA of capacity and battery backup, in 120V or 230V systems. External battery cabinets may be added for extended run time.

### On-Line UPS Protection for Essential and Critical Applications

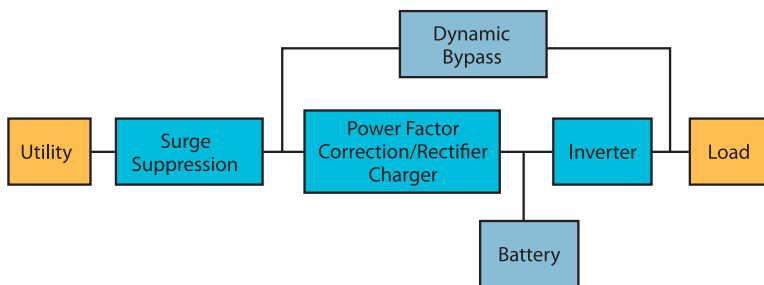

Liebert GXT3 is a true on-line power source, so whatever the quality of power coming in, the pure sinewave output meets the exacting standards of your equipment.

Liebert GXT3 includes:

- Power factor correction
- Internal batteries
- Frequency conversion
- Internal automatic bypass to utility in case of adverse UPS conditions
- Manual bypass capability
- Support for up to four external battery cabinets (rack/tower models)

Liebert GXT3 handles all these potential power problems:

- Power spikes and transients
- EMI/RFI noise
- Voltage sags and brownout conditions
- Harmonics
- Power-factor corrected loads
- Outages
- Frequency variations



*Liebert GXT3 is easily configured for either rackmount or tower applications. The LED display rotates for easy viewing in either orientation.*



*Liebert GXT3 contains internal batteries, and is also able to support up to four external battery cabinets – also 2U size.*

## Higher Availability

### Advance Early Warning of UPS System Status

Multiple audible and visual alarms immediately alert you to an output overload, low battery, bypass, battery discharge, battery loss or replace battery condition.

### 4-6 minutes of Battery Backup Time at Full Load at 0.9 Power Factor

Provides ample time for an orderly shutdown of connected equipment when utility power fails. Optional matching external battery cabinets offer additional backup time.

### Overload Capability

Designed to handle output overload conditions.

### Full Sequenced Battery Testing

Provides automatic and manual self-diagnostic battery testing capabilities. It analyzes the condition of the batteries within the UPS and will notify you when the internal batteries need to be replaced.

### User Replaceable Hot Swappable Batteries

Easy to replace batteries increase product life and provide prolonged UPS reliability. Batteries are conveniently located behind the front bezel of the unit.

### Power-Factor Correction

Prevents noise, harmonics and distortion from being passed on to connected loads or from being fed back to the utility.

### Internal Automatic and Manual Bypass Capability

Assures continuity of power to critical loads during system problems or maintenance.

### Intelligent Battery Management

Includes efficient three-stage charging technique and comprehensive discharging protection that extends battery life for greater availability.

### Input Circuit Breaker

Provides increased protection to ease recovery from overloads.

### Lightning and Surge Protection

The transient voltage surge suppression (TVSS) circuitry inside Liebert GXT3 provides additional protection for the connected equipment from incoming spikes, surges, and other power anomalies present on the incoming utility power source.

## Lowest Total Cost Of Ownership

### 0.9 Output Power Factor

Liebert GXT3 rated output power factor of 0.9 better matches up with switch-mode power supplies used in today's IT equipment. A higher output power factor allows for a more efficient utilization of the UPS.

### Wide Input Voltage Window

Prolongs battery life by allowing the UPS to maximize the use of utility power before transferring to battery when input voltage exceeds specified limits.

### Intelligent Fan Operation

Automatically changes rotation speed depending on system requirements to decrease power consumption and noise.

### Efficient Operation

90% AC-AC efficiency

### Warranty Protection

The industry's best warranty – No-hassle two-year warranty with UPS replacement in the event of problems. Shipping is free for both original UPS return and the replacement unit. Optional one-year and three-year extensions also available.

## Multiple Choices For Communication, Shutdown And Reporting

### SNMP And Web-Based Communication Options

Liebert IntelliSlot® Web Card provides SNMP and web-based management to your Liebert GXT3. Provides SNMP MIB to monitor and control your UPS from your network management station or any PC running Microsoft Internet Explorer.

- Network shutdown
- Sends both SNMP traps and emails for event notification, and automatically emails a daily UPS history
- Auto-senses 10M/100M Ethernet
- Compatible with shutdown software to ensure graceful computer shutdown

The Liebert GXT3 is also fully compatible with:

- Liebert MultiLink™ shutdown software –included with the Liebert GXT3 UPS
- Liebert Nform™ monitoring software
- Liebert Multiport multiplexing unit
- Liebert Intellislot Relay Interface Card

### USB Communications

Windows (98 and later) built-in power management functions provide monitoring of UPS status and manage the automatic orderly shutdown of the computer if a power outage ever exceeds the battery capacity of the UPS. Liebert MultiLink shutdown software can also be used via USB connection.

### Optional Liebert MicroPOD Output Distribution And Maintenance Bypass Module

When your computer system can't be without power, even for scheduled UPS maintenance, the Liebert MicroPOD Maintenance Bypass and Output Distribution Unit ensures continuous uptime. It allows you to manually transfer connected equipment to utility power via a maintenance bypass switch, permitting scheduled service or UPS replacement without the need to shut down connected equipment. Features include:

- 2U height minimizes rack space requirements
- Installs with plug-and-play ease
- Two-year, no-hassle replacement warranty



Liebert MicroPOD




Liebert GXT3 mini-tower model provides 1000VA capacity in a compact design.

### Battery Run Times

Number of Batteries	Model VA 1	Load, % of Capacity									
		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Internal Battery	700VA	115	57	39	29	24	19	15	12	10	9
	1000VA	84	42	28	20	14	11	9	8	6	5
	1500VA	109	46	27	19	13	10	8	6	5	4
	2000VA	73	33	21	14	11	8	7	5	4	4
	3000VA	73	34	21	14	11	9	7	5	4	4
Internal Battery +1 External Battery Cabinet	700VA	529	284	194	139	111	93	77	66	56	50
	1000VA	386	212	129	98	75	59	50	42	35	32
	1500VA	315	147	96	67	50	39	33	27	23	20
	2000VA	252	117	78	58	43	35	28	25	21	19
	3000VA	252	120	78	57	43	35	29	25	22	19
Internal Battery +2 External Battery Cabinets	700VA	1110	524	380	281	230	189	149	125	108	97
	1000VA	765	383	265	197	142	115	97	86	76	67
	1500VA	576	283	182	123	97	80	66	55	48	42
	2000VA	467	227	141	98	80	66	54	46	40	36
	3000VA	467	227	141	98	80	66	55	46	41	36
Internal Battery +3 External Battery Cabinets	700VA	1522	895	560	389	345	287	242	208	165	156
	1000VA	1136	584	388	305	238	188	157	128	110	96
	1500VA	790	406	263	196	147	114	96	86	75	65
	2000VA	681	321	217	148	110	89	80	70	61	55
	3000VA	681	321	217	148	110	91	80	70	62	55
Internal Battery +4 External Battery Cabinets	700VA	1991	1208	822	550	460	360	317	280	247	219
	1000VA	1488	880	553	380	315	263	215	185	161	137
	1500VA	1104	567	348	271	209	165	128	113	96	87
	2000VA	994	467	285	206	163	120	101	88	80	74
	3000VA	995	467	285	206	163	120	104	88	81	74

### Rear Panel Components, Liebert GXT3 230V, 700VA, 1000VA and 1500VA models

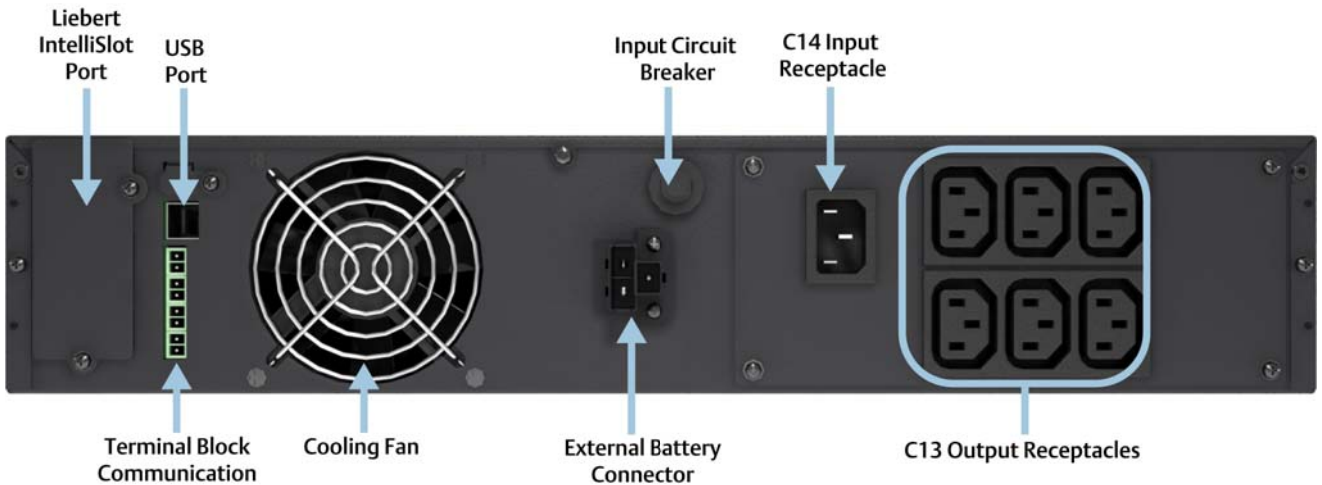

## Technical Specifications

Model Number	GXT3-700RT230	GXT3-1000RT230	GXT3-1500RT230	GXT3-2000RT230	GXT3-3000RT230
Input Connection	IEC-320 C14			IEC-320 C20	
Output Connection	IEC-320 C13 x 6				IEC C13 x 6 + C19 x 1
Communication Interface	USB, Terminal blocks (any mode shutdown, On batt, Low batt), Intellislot				
Dimensions: (mm)	85(2U) x 430 x 497				88 (2U) x 430 x 602
Shipping Dimensions: (mm)	262 x 570 x 617				262 x 570 x 717
Net Weight: (kg)	16.8	16.8	23.2	24.0	28.0
Shipping Weight: kg	20.0	20.0	26.0	28.0	32.0
Form Factor	Rack/Tower Convertible, Tower Stand included				
Input Power Cable	Nil			"Shucko" CEE 7/7 and BS1363 to IEC-320-C19	
Number of Output Cable	2			3	
Software	Liebert Multilink, support for Windows NT/2000/XP/Vista, Linux				
Operation	GXT3-700RT230	GXT3-1000RT230	GXT3-1500RT230	GXT3-2000RT230	GXT3-3000RT230
Capacity	700VA/630W	1000VA/900W	1500VA/1350W	2000VA/1800W	3000VA/2700W
Normal Input Voltage	220/230/240VAC (configurable)				
Input Voltage Window	177-280VAC (100% load), 115-280VAC (30% load)				
Input Frequency Window	40-70Hz				
Input Protection Type	Resettable Circuit Breaker				
Default frequency	50Hz				
Efficiency	>90% on Line Mode				
Output (battery mode)	Voltage	220/230/240VAC (configurable)			
	Voltage Regulation	≥± 3%			
	Wave Form	Pure Sine Wave			
Battery type	Sealed, non-spillage, maintenance-free, lead acid with 5 year typical lifetime				
Quantity x Voltage x Ah	4 x 12 x 5		4 x 12 x 7.2	4 x 12 x 9	6 x 12 x 9
Backup Time at full load pf 0.7	>11 minutes	>8 minutes	>8 minutes	>6 minutes	>5 minutes
Backup Time at full load pf 0.9	>6 minutes	>4 minutes	>4 minutes	>4 minutes	>4 minutes
Typical Recharge Time	3 hours to 90% of rated capacity, after full discharge into resistive load				
Hot Swappable Battery	Yes				
RFI/EMI	IEC/EN/AS62040-2 2nd Ed = CISPR22 Class A				
Agency Approvals	Safety	IEC/EN/AS 62040-1-1: 2008			
	Surge Immunity	IEC/EN/AS 62040-2 2nd Ed			
	Transportation	ISTA Procedure 1A Certification			
	WEEE and ROHS	Yes			
Operation Condition	3,000 meter max. elevation, 0-95% humidity non-condensing 0-40 deg. C				
Noise Level	<45dBA on Line Mode			<48dBA on line mode	
Accessories	GXT3-700RT230	GXT3-1000RT230	GXT3-1500RT230	GXT3-2000RT230	GXT3-3000RT230
SNMP/WEB Management Card	IS-WEBCARD				
External battery cabinet	GXT3-48VBATT				GXT3-72VBATT
Maintenance Bypass Switch	MP2-210K				MP2-220L

## Battery Cabinet Specifications

Parameters	Model Number	
	GXT3-48VBATT	GXT3-72VBATT
Used w/UPS Model	GXT3-700RT230, GXT3-1000RT230, GXT3-1500RT230, GXT3-2000RT230	GXT3-3000RT230
Dimensions, D x W x H, mm (in)		
Unit	497 x 430 x 85 (19.7 x 16.9 x 3.3)	602 x 430 x 85 (23.6 x 16.9 x 3.3)
Shipping	617 x 570 x 262 (24.3 x 22.4 x 10.3)	717 x 570 x 262 (28.2 x 22.4 x 10.3)
Weight, kg (lb)		
Unit	32 (70.5)	42 (92.6)
Shipping	35 (77.2)	46 (101.4)
Battery parameters		
Type	Valve-regulated, nonspillable, lead acid	
Qty x V x Rating	2 x 4 x 12V x 9.0 Ah	2 X 6 X 12V x 9.0Ah
Battery Mfr/Part#	Panasonic/UP-RW1245 CSB/HR 1234W F2	



### Global Service and Local Reach

Emerson Network Power provides the advantage of no hassle warranty and product maintenance agreements. Our technical support experts are available locally and through toll free lines, covering all models of Liebert GXT3.

**Emerson Network Power Asia Pacific**

**Australia**

T: 1800-065345  
F: 61-2-97438737

**Indonesia**

T: 62-21-2513003  
F: 62-21-2510622

**Japan**

T: 81-3-54038594  
F: 81-3-54032924

**Korea**

T: 82-2-34831500  
F: 82-2-5927883

**Malaysia**

T: 603-78845000  
F: 603-78845188

**New Zealand**

T: 64-3-3392060  
F: 64-3-3392063

**Pakistan**

T: 92-42-36622526 to 28  
F: 92-42-36622530

**Philippines**

T: 63-2-6203600  
F: 63-2-6203693

**Singapore**

T: 65-64672211  
F: 65-64670130

**Thailand**

T: 66-2-6178260  
F: 66-2-6178277 to 78

**Vietnam**

T: 84-4-37628908  
F: 84-4-37628909

**Emerson Network Power.**

The global leader in enabling *Business-Critical Continuity™*.

■ **AC Power**

■ Embedded Computing

■ Outside Plant

■ Racks & Integrated Cabinets

■ Connectivity

■ Embedded Power

■ Power Switching & Controls

■ Services

■ DC Power

■ Infrastructure Management & Monitoring

■ Precision Cooling

■ Surge Protection

**EmersonNetworkPower.com**